

EXHIBIT B

RDMAC Storage Subgroup Voting Record

Mike Ko

Updated as of 1/24/2009 3:58:00 PM

Note that some storage-related votes have been duplicated from the RDMAC Voting Record and meeting minutes including those from the Contributors WG and the Founders Group.

RWG-mtg-020626-dg.doc (F2F)

Microsoft Motions: RDMAC should explore a SCSI storage mapping to iWARP.

IBM Seconds

Motion passes by acclimation

Microsoft Motions: RDMAC shall use the iSCSI infrastructure with the possible exception of data transfer and login.

IBM Seconds

Motion passes by acclimation

Microsoft Motions: That RDMAC set the initial scope of the Storage sub-team to be “explore SCSI data transfer on iWARP using iSCSI infrastructure and login”.

Adaptec Seconds

Motion passes by acclimation

RFG-mtg-020627.doc (RR)

Microsoft motions that the RDMAC enable the working group to setup a sub-team which is scoped to explore SCSI data transfer on iWARP using iSCSI infrastructure and login.

MS motioned, EMC seconded via e-mail.

results:

Adaptec	Yes
Broadcom:	Yes
Cisco	
EMC	Yes – via e-mail
HP	Yes
IBM	Yes
Intel	Yes
Microsoft	Yes
Network Appliance	Yes

Motion passes.

After the call Renato noticed the operating procedures also state that: "The Working Group may, at its convenience, establish sub-groups to deal with individual topics or sections of a proposal or specification. The chairs of each sub-group will be appointed by the Working Group chairpersons." Renato suggest use the process we discussed during the call, because it provides a more fair distribution of co-chair appointments (i.e. entire founders group vs discretion of the Working Group co-chairs). Another alternative that would also be fair, would be to have the members of the contributors group select the co-chairs.

RWG-mtg-020712-dg.doc

Motion to chose 2 of the three choices for storage sub-group co-chairs:

Adaptec	Jim & Hamel
Broadcom:	Jim & Mike
Cisco	
EMC	Jim & Mike
HP	Jim & Mike
IBM	Jim & Mike
Intel	Hamel & Mike
Microsoft	Jim & Mike
Network Appliance	Jim & Mike

Jim P: The two new co-chairs are Jim Wendt & Mike Ko.

Microsoft motions that electing subgroup co-chairs be on an individual basis and not a company basis.

Renato: IBM seconds.

Broadcom Abstains. Motion passes

RWG-020809.doc (ED)

Motion from email discussion: iSCSI 1.0 interoperability as represented by the following table is required of an endnode.

Adaptec seconds.

(from email - xxx - xx/xx/xx)

1.0 = iSCSI 1.0 support
iW = iWARP support

Capability Initiator	Capability Target	Resultant Negotiated Data Transfer model after login
1.0	1.0	1.0
iW/1.0	1.0	1.0

1.0 iW/1.0 1.0
iW/1.0 iW/1.0 iW

Roll call:

Adaptec	Y
Broadcom:	Y
EMC	Y
HP	Y
IBM	Y
Intel	Y
Microsoft	Y
Network Appliance	Y

Motion passed unanimously.

RSTG-mtg-020812-jw.doc

HP Motion - "The Storage Subgroup requests a modification

of the charter from the Founders to do a mapping function wire protocol and specification for iSCSI to iWARP and that the storage subgroup owns binding votes in these respective areas"

MS seconds motion

Roll call vote

Adaptec	Y
Broadcom:	Absent
EMC	Y
HP	Y
IBM	Y
Intel	Y
Microsoft	Y
Network Appliance	Absent

Motion passes

HP Motions "- The Storage Subgroup requests that the Working Group delegate investigation and definition of new verbs that are motivated by storage and that the Working Group delegate to the Storage Subgroup binding votes in this area"

IBM Seconds

Motion passes by Acclamation

HP Motions "The Storage Subgroup requests that the Working Group delegate investigation and definition of modifications to existing verbs that are motivated by storage and that the Working Group delegate to the Storage Subgroup binding votes in this area"

IBM Seconds

Motion passes by Acclamation

HP Motions "The Storage Subgroup requests that the Working Group delegate investigation and recommendation of the immediate data mechanism for the iWARP protocols to be completed 8/16"

IBM Seconds

Motion passes by Acclamation

RSTG-mtg-020814-jw.doc

EMC Motion - the Storage Subgroup finds that Immediate Data is NOT necessary

MS seconds

Intel - Friendly Amendment - the Storage Subgroup finds that Immediate Data is NOT necessary for SCSI mapping

MS seconds

Binding vote - "The Storage Subgroup finds that Immediate Data is NOT necessary for SCSI mapping."

Adaptec	Y
Broadcom:	Y
EMC	Y
HP	Y
IBM	Y
Intel	Y
Microsoft	Y
Network Appliance	Absent

Motion passes**RWG-mtg-020814-jw.doc**

MS motions - all of a) and all of b) be accepted

<<<

JH - read Jim Wendt's email (8/12 - Request for agenda item - 8/14 Contributors WG meeting): as follows:

The Storage Subgroup requests the following agenda item be added for the 8/14 Contributors Working Group meeting:

*** Storage Subgroup Delegations**

- The Storage Subgroup requests that the Working Group delegate investigation and definition of new verbs that are motivated by storage and that the Working Group delegate to the Storage Subgroup binding votes in this area.
- The Storage Subgroup requests that the Working Group delegate investigation and definition of modifications to existing verbs that are motivated by storage and that the Working Group delegate to the Storage Subgroup binding votes in this area.
- The Storage Subgroup requests that the Working Group delegate investigation and recommendation of the immediate data mechanism for the iWARP protocols to be completed 8/16.

Thanks,
JimW

JH - item c) was already done this morning in Storage subgroup call

>>>

IBM seconds

- a) The Storage Subgroup requests that the Working Group delegate investigation and definition of new verbs that are motivated by storage and that the Working Group delegate to the Storage Subgroup binding votes in this area.
- b) The Storage Subgroup requests that the Working Group delegate investigation and definition of modifications to existing verbs that are motivated by storage and that the Working Group delegate to the Storage Subgroup binding votes in this area.

Motion passes by Acclamation

HP Motions that - "The SCSI Write data transfer mechanism in the recommendation from the Storage Subgroup will be RDMA Reads"

Adaptec seconds

Binding roll call vote:

Adaptec	Y
Broadcom:	Y
EMC	Y
HP	Y
IBM	Y
Intel	Y
Microsoft	Y
Network Appliance	Y

Motion passes

RFG-mtg-020814.doc (RR)

The Founder WG charts the Storage Subgroup to do an iSCSI to iWARP mapping function and associated wire protocol. The storage subgroup owns binding votes in these respective areas and must coordinate with other standard bodies (e.g. ANSI T10 and IETF) for the SCSI encapsulation.

Intel motions to accept the text as captured in the sentence immediately above, Adaptec seconds:

Adaptec	Y
Broadcom:	Y
Cisco	Y
EMC	Y
HP	Y
IBM	Y
Intel	Y
Microsoft	Y
Network Appliance	Y

(motion passes)

**RSTG-mtg-020819-
mk.doc**

Microsoft motions that – “Create a semantics in the send message that encapsulates the SCSI response that will provide an invalidate STag capability”

IBM seconds

Amended motion - “Create a semantics in the Send and SendSE messages only that encapsulates the SCSI response that will provide an invalidate STag capability”

Object – NetApp

Abstain – None

Motion passes 7 to 1

RWG-020819.doc (ED)

HP IBM motions that the Send with “invalidate STag message” and Send with SE and “invalidate STag message” be added to the RDMA protocol. When that message is received the data sink will invalidate the STag contained in the message.

Microsoft seconds.

Motion passes by acclamation with one abstention and one absent.

RWG-mtg-020821-jw.doc

MS Motions - "The STag invalidate feature be implemented as an extension of the existing DDP control field in untagged messages only from one to five bytes and that the DDP control field be valid in every segment of the DDP message"

IBM seconds

Motion passes by Acclamation

HP Motions - "We will not extend the Reserved ULP data field in tagged messages for DDP"

IBM seconds

Amended Motion - "We will not extend the Reserved ULP data field in tagged messages for DDP beyond one byte"

IBM accepts friendly amendment

Motion passes by Acclamation

IBM Motions - "The Send with Invalidate Stag message and Send with SE Invalidate Stag message be added to the RDMA protocol. When either of those messages are received, the data sink will invalidate the Stag in the message."

MS Seconds

Amended Motion - "The Send with Invalidate Stag message and Send with SE Invalidate Stag message be added to the RDMAP protocol. When either of those messages is received at the Data Sink, the Data Sink will invalidate the Stag contained in the message if that Stag is associated with the RDMA Stream."

IBM accepts friendly amendment

MS accept friendly amendment

Motion passes by acclimation

RSTG-mtg-F2F-020905-jw1.doc

IBM motions "we accept the schedule that we worked out on 9/4 F2F"

Dates copied from slide displayed by MK

v0.1 – 9/12/02

v0.5 – 10/22/02

v0.7 - 12/13/02

v0.8 – 1/17/03

v0.9 – 2/14/03

v0.95 – 3/7/03

v1.0 – 4/14/03

Adaptec seconds

Microsoft friendly amendment "we accept the iPER (iSCSI Protocol Extensions for RDMA) and DI (Datamover Interface) schedule that we worked out on 9/4 F2F"

IBM accepts friendly amendment

Adaptec accepts friendly amendment

Binding vote:


Adaptec	Y
Broadcom:	Y
EMC	Y
HP	Y
IBM	Y
Intel	Y
Microsoft	Y
Network Appliance	Y

Motion passes

RSTG-mtg-0209091.doc (ED)

HP motions to adopt the iSCSI-R layering slide

(from slide – iSCSI-R-Layering-v1.ppt – 9/10/02 - Jim Wendt)

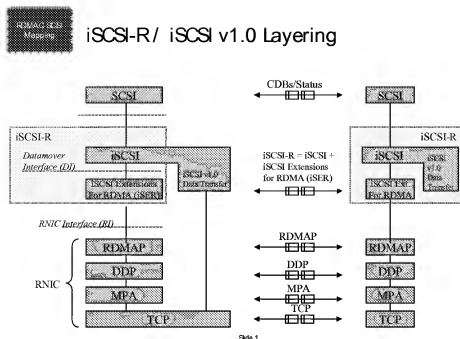

with the following four changes:

- TCP Data Transfer changes to iSCSI V1.0 data transfer
- iSCSI protocol extensions for RDMA (iPER) changes to iSCSI extensions for RDMA (iSER)
- Remove the TOE I/F and the associated dashed line
- Change the RDMAP Ops or Verbs to RNIC Interface (RI)

and two additional changes:

- iSCSI-R V1.0 data transfer block to the RHS of the diagram. (To be symmetric).
- Add iSCSI V1.0 to the title of the slide.

Broadcom seconds.


Motion passes by acclamation.

The updated slide is as follows:

(slide from – RDMAC iSCSI-R-layering-v2.ppt – 9/10/02 - John Hufferd)



iSCSI-R/ iSCSI v1.0 Layering

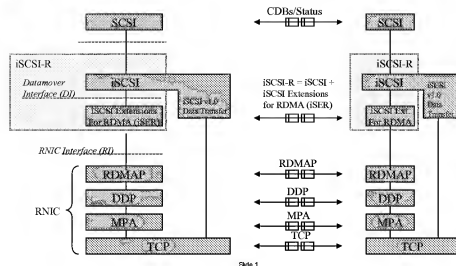

IBM motions that we accept the first bullet as a requirement.

MikeK: Changed from no changes to the iSCSI Architecture SAM to no major changes.

- iSCSI-R must not require major changes to SCSI Architectural Model (SAM/SAM-2/SAM-3) and SCSI Primary Commands (SPC-3)

Intel seconds with the friendly amendment to spell out SPC, SPC-2, SPC-3 instead of just SPC-3.

IBM accepts the friendly amendment.

Motion passes by acclamation.

IBM motions that we accept the second bullet as a requirement.

Second bullet:

- iSCSI-R must utilize existing iSCSI infrastructure including but not limited to MIB, bootstrapping, iSNS, naming & discovery, security, etc.

Intel seconds.

Motion passes by acclamation.

IBM motions to that we accept the third bullet, modified as above, as a requirement.

Third bullet:

- iSCSI-R must not be required to interoperate with existing iSCSI v1.0 implementations

Changed wording to read:

- iSER is not required to interoperate with iSCSI v1.0 implementations in full feature phase.

Intel seconds.

Motion passes by acclamation.

IBM motions to accept the entire session management slide deck.

EMC seconds

Motion passes by acclamation.*(slides from – session_management.ppt - 9/7/02 - Mike Ko)***Session Management**

- No change in iSCSI's definition that an I_T nexus maps to a session
- No changes to mechanisms described in iSCSI for:
 - Connection reinstatement
 - Session reinstatement
 - Session continuation
 - Session closure
 - Session failure
- Votable: iSCSI-R MUST use the mechanisms described in iSCSI for connection reinstatement, session reinstatement, session continuation, session closure, and session failure

Slide 1

RSTG-mtg-0209011.doc (ED)

HP motions that we accept the following requirement: iSCSI-R must not require any additional mechanisms over those provided by the MPA/DDP/RDMAP wire protocols, RNIC hardware and RNIC Interface (RI).
Broadcom second.

Motion passes by acclamation.

HP motions that the DI spec for 0.1 outline contained in the 3 slides 11, 12 and 13 be accepted.

Intel seconds.

Motion passes by acclamation*(slides from – Datamover_Interactions_v0.20.ppt – 9/9/02 - Mallikarjun Chadalapaka)*



DI spec outline

Following is the proposed DI spec outline.

1. Status of this Memo
2. Abstract
3. Introduction
4. Motivation
5. Terminology
 - 5.1 iSCSI PDU types
 - 5.2 Data Descriptor
 - 5.3 Connection_Handle
6. Datamover layer
7. Operational Primitives required by iSCSI
 - 7.1 Send_Control
 - 7.2 Send_Data
 - 7.3 Retrieve_Data

VO.20 Slide 11

September 09, 2002



DI spec outline

8. Operational Primitives provided by iSCSI
 - 8.1 Control_Notify
 - 8.2 Connection_Terminate_Notify
 - 8.3 Data_Completion_Notify
 - 8.4 Data_ACK_Notify
9. Architectural layering of iSCSI and Datamover layers
10. Modeling description for the interactions
 - 10.1 Overview
 - 10.2 Interactions for handling asynchronous notifications
 - 10.2.1 Connection termination
 - 10.2.2 Data transfer completion
 - 10.2.2.1 Completion of a requested SCSI Data transfer
 - 10.2.3 Data acknowledgement
 - 10.3 Interactions for sending an iSCSI PDU
 - Subsections for each iSCSI v1.0 opcode.

VO.20 Slide 12

September 09, 2002



DI spec outline

10.4 Interactions for receiving an iSCSI PDU

Subsections for each iSCSI v1.0 opcode.

11. Security Considerations

12. IANA Considerations

13. References and Bibliography

13.1 Normative References

13.2 Informative References

14. Authors' Addresses

15. Acknowledgements

Appendix A. Datamover considerations

Votable: HP motions that the DI spec outline contained in these 3 slides be accepted.

V0.20 Slide 13

September 09, 2002

RSTG-mtg-020916-jc.doc

HP motions to make Agilent voting member of storage subgroup

IBM seconds

Motion passes by acclamation

IBM motions that the iSER outline as described be accepted

HP seconds

Motion passes by acclamation

(slides from – iser_outline_v01.ppt - 9/11/02 – Mike Ko)



iSER Specification Outline

1. Definitions and acronyms
2. Overview
 - Contains the motivation and architectural goals, and provides overviews on iSCSI compatibility, iSCSI-R layering, iSCSI session/ stream mapping, iSCSI-R data movement request/ response scenarios, etc.
3. Login and full feature phase negotiation
 - Describes the session management mechanisms, session and connection initialization, steering mode key negotiation, mixed mode sessions (if any), etc.
4. Lower layer protocol requirements
 - Describes the RDMAP requirements
5. Upper layer interface requirements
 - Refers to the Datamover Interface
6. iSER error handling and recovery
 - Describes the impact of MPA CRC on iSCSI, support of iSCSI digests, ErrorRecoveryLevel supported, allegiance reassignment, etc.

Slide 2



Specification Outline (cont.)

7. Security considerations
8. iSER FDU formats
 - Describes the handling of iSCSI control and data FDUs between the Datamover Interface and the RDMAP layer
 - Describes the formats of the control and data packets
 - Describes STag management, supported FDUs (e.g., SNACK)
9. Login operational keys
 - New login parameter requirements for iWARP
10. IANA considerations
 - Appendix
 - Describes an iWARP FDU containing the iSCSI-R packet.
 - Describes an iSCSI transaction example (e.g., how a SCSI Read/ Write is handled by the different layers from the local peer to the remote peer)
 - RNIC spanning

Votable: IBM motions that the iSER spec version 0.1 outline contained in these 2 slides be accepted.

Slide 3

HP motions the DI design slide with the two changes described today be accepted (add new bullet #3, remove 'iWARP' from bullet #4)

- new bullet 3 – “The DI spec enables implementing the datamover layer either in hardware or in software”
- remove “iWARP” from (new) bullet #4

IBM seconds

Motion passes by acclamation

(slide from – Datamover_Interactions_v0.20.ppt – 9/9/02 - Mallikarjun Chadalapaka)



Design ideas

- An abstract procedural interface definition of iSCSI layer's interactions with a Datamover layer below – i.e. this models the interactions between the logical "bottom" interface of iSCSI and the logical "top" interface of a Datamover.
- The DI spec guides the SCSI mapping wire protocol (iSER) by defining the iSCSI knowledge iSER may utilize in its protocol definition (for ex., the DI spec completely contains the notion of "iSCSI session" to the iSCSI layer).
- Not a wire protocol spec, only a model for interactions between iSCSI and Datamover layers operating within an iSCSI/iWARP endpoint.
- The DI spec by design seeks to model the iSCSI-Datamover interactions in a way that the modeling is independent of the specifics of either a particular iSCSI revision, or a particular instantiation of a Datamover layer.
- Relies on a defined set of Operational Primitives (could be seen as endpoint definitions in implementation terms) provided by each layer to the other to carry out the request-response interactions.

Votable: HP motions that the DI design ideas contained in this slide be accepted.

V0.20 Slide 2

September 09, 2002

RSTG-mtg-020918-pat.doc

HP - Moved that the operation requirements of a Datamover layer listed in slide 4 of Data_Mover_Interactions_v0.21 (Sept 18) be accepted.

Broadcom - seconds
passed by acclamation



Datamover layer?

- The following are proposed to be the operational requirements to be considered a "Datamover layer" per the DI spec.
 - guarantees that all the necessary data transfers take place when the local iSCSI layer requests transmitting a command (in order to complete a SCSI command, for an initiator) or sending/receiving an iSCSI data sequence (in order to complete part of a SCSI command, for a target),
 - transports an iSCSI control-type PDU to the peer Datamover layer when requested so by the local iSCSI layer.
 - provides a notification and delivery to the iSCSI layer upon arrival of an iSCSI control-type PDU.
 - provides an end-to-end data acknowledgement of iSCSI read data operations, when requested.
 - provides an asynchronous notification of data transfer operations upon completion.
 - places the SCSI data into the data buffers or picks up the SCSI data for transmission out of the data buffers that the iSCSI layer had requested be used for a SCSI I/O.
 - guarantees an error-free, reliable, in-order transport mechanism over IP fabrics in performing the data transfer, and asynchronously notifies the iSCSI layer upon iSCSI connection termination.

Votable: HP motions that the operational requirements of a Datamover layer that are listed in this slide be accepted.

VO.21 Slide 4

September 15, 2002

HP - Moved that iSCSI PDU class taxonomy contained in Slide 6 of Data_Mover_Interactions_v0.21 (Sept 18) be accepted.

Intel - seconds

passed by acclamation



iSCSI PDU classes

- Crucial difference between
 1. iSCSI PDUs that are transported intact to the peer iSCSI layer ("iSCSI control-type PDUs"), and
 2. iSCSI PDUs that trigger iSCSI-transparent RDMA transactions to effect data transfer ("iSCSI data-type PDUs"), without involvement from the peer iSCSI layer.
- Datamover layer is assumed to transport all iSCSI control-type PDUs using the same mechanism, such as the Send Message, and its peer Datamover layer reliably delivers them to the remote iSCSI layer.
- In case of iSCSI data-type PDUs, Datamover layer carries out the requested data transfer to the remote iSCSI node. However, the PDUs are not delivered to the remote iSCSI layer. There are only three data-type PDUs –
 - a) R2T PDU
 - b) iSCSI Data-in PDU
 - c) iSCSI Data-out PDU (solicited only, unsolicited Data-out PDUs are control-type PDUs)
- All other iSCSI PDUs are termed as iSCSI control-type PDUs for this discussion.

Votable: HP motions that the iSCSI PDU class taxonomy contained in this slide be accepted.

VO.21 Slide 6

September 15, 2002

HP - Moved that the model for PDU interactions and connections described in slide 8 of Data_Mover_Interactions_v0.21 (Sept 18) be accepted except send_data and retrieve_data will be changed to put_data and get_data.

Intel - seconds

passed by acclamation



Modeling PDU interactions & Terminate

- All iSCSI control-type PDU exchanges can be modeled using the Send_Control and Control_Notify pair of Operational Primitives. This applies to the following iSCSI PDU opcodes in iSCSI v1.0.
 - SCSI Command/ Response, Task Management Function Request/ Response
 - Text Request/ Response, Login Request/ Response, Logout Command/ Response,
 - Asynchronous Message, Reject, NOPIn, NOPOut, SNACK
- All iSCSI data-type PDU exchanges (actually it only results in transfer of data referenced by the PDU, not the PDU per se) can be modeled using
 - a) Put_Data & Data_Completion_Notify pair of Operational Primitives (for outbound data transfer), or
 - b) Get_Data & Data_Completion_Notify pair of Operational Primitives (for inbound data transfer)
- A Datamover layer notifies the iSCSI layer upon iSCSI connection termination via the Connection_Terminate_Notify Operational Primitive. The iSCSI layer is expected to process it as defined in the iSCSI spec.

Votable: HP motions that the model for PDU exchange interactions and connection termination described in this slide be accepted.

V0.21 Slide 8 September 18, 2002

HP _ Moved that the model for iSCSI data acknowledgements described on slide 10 of Data_Mover_Interactions_v0.21 (Sept 18) be accepted.

Intel - seconds

passed by acclamation



Modeling iSCSI Data acknowledgements

- The iSCSI spec defines an iSCSI Data Acknowledgement request (that can only originate from a target iSCSI layer) as an iSCSI Data-in PDU with the A-bit set. Such an iSCSI Data-in PDU triggers two eventual notifications in this proposed model.
 - a) The first notification is for the completion of the outbound data transfer that is defined by the Data-in PDU and requested via the Put_Data Operational Primitive (the notification done via the Data_Completion_Notify Operational Primitive).
 - b) The second notification is for a Datamover-managed data acknowledgement response arrival (done via the Data_ACK_Notify Operational Primitive).

Votable: HP motions that the model for iSCSI data acknowledgements described in this slide be accepted.

VO 21 Slide 10 September 10, 2002

RWG-mtg-020918-emd.doc

IBM motions that for an iSCSI command the initial TO field must start at zero.

Microsoft seconds.

MC: Not for an iSCSI command, it is iSER header carrying an iSCSI command assumes that the initial TO field is zero.

Microsoft accepts the

Motion passes by acclamation.

RSTG-mtg-020923-ue.doc

HP motions that "there shall be an iSER header"

Second: Intel

PASSES by acclamation

IBM motions that "iSER header shall be located between the iWARP header and the iSCSI PDU".

Intel - friendly amendment:

IBM motions that "for all iSCSI "control type" PDU, an iSER header is positioned following the iWARP header"

Intel seconds.

Passes by acclamation

HP motions: “There shall be a control field in the iSER header”

BROADCOM seconds.

Passes by acclamation

RSTG-mtg-020925-tc.doc

HP moves that the iSER header be fixed in size.

Intel seconds.

passes by acclamation.

HP moves that the iSER header contains a Write Stag followed by a Read Stag field and two bits in the control field that indicates the validity of those two stags.

Intel seconds.

HP accepts friendly amendment (reflected above).

passes by acclamation.

Agilent moves that there be a version in the iSER header control field.

IBM seconds.

HP friendly amendment to put it in the control field.(reflected above)

Agilent - either way is OK. I accept that.

passes by acclamation.

IBM moves For iSCSI connections, iWARP mode is negotiated during the iSCSI login exchanges after TCP connection establishment.

Intel seconds.

Intel friendly amendment: reflected above.

Accepted by IBM and Intel.

passes by acclamation.

RSTG-mtg-020930-jw.doc

IBM motions (updated with amendments) – An RDMA mode key of the form “RDMAExtensions=<boolean-value>” with result function of AND available to both the initiator and the target only during iSCSI log-in with the default being No is used to determine iSER support for the iSCSI peers”

EMC seconds

Microsoft friendly amendment – use “iSER support” not “iWARP support” (reflected above)

IBM accepts friendly amendment

EMC accepts

MC – default should be “No” (reflected above)

MC – friendly amendment – change to call it “RDMA mode key” (reflected above)

EMC accepts

Motion passes by acclimation

RSTG-mtg-021002-mk.doc

IBM Motions - The same steering mode is not required for all connections of the same session.

EMC Seconds

Binding vote :

Adaptec	Absent
Agilent	N
Broadcom:	N
EMC	N
HP	N
IBM	Y
Intel	N
Microsoft	N
Network Appliance	Abstain

Motion fails

IBM motions - The same steering mode is required for all connections of the same session.

EMC seconds

Further discussion - none

Vote against – none

Abstain – IBM

Motion pass by acclimation

RSTG-mtg-021007.doc (ED)

Intel motions: The Read STag used in a bi-directional command is invalidated with a Send with Invalidate and Solicited Event message. If a Write STag is present in a bi-directional command, it is invalidated by the initiator using local means.

IBM seconds.

Motion passes by acclamation.

RSTG-mtg-021010.doc (TT/JP - 10/9 Storage F2F)

IBM moves the following: iSER shall support unsolicited data transfer (both immediate and non-immediate) using only RDMAP Send message type.

[Roll call vote]

Microsoft seconds.

Binding vote:

Agilent	Y
Adaptec	Y
Broadcom:	Maybe Yes
EMC	Y
HP	Y
IBM	Y
Intel	Y
Microsoft	Y
Network Appliance	Y

Motion passes unanimously.

IBM moves the following: An iSCSI command and its associated immediate data, if any, shall be transferred in a single RDMAP Send message.

Agilent seconds.

Friendly amendment: add "segment", delete immediate.

An iSCSI command and its associated iSCSI data segment (e.g. immediate data), if any, shall be transferred in a single RDMAP Send message.

IBM and Agilent accept amendment.

Motion passes by acclamation.

IBM moves: Each iSCSI Unsolicited DataOut pdu shall be transferred through one RDMAP Send message type.

Intel seconds.

Motion passes by acclamation.

IBM moves: The number and size of SGL elements for the iSER receive queue is implementation dependent.

Broadcom seconds.

Motion passes by acclamation.

HP moves: ISER shall support a new iSCSI login key that requires the Initiator to fill all non-last unsolicited data to a negotiated, fixed size (including immediate data and DATAOUT PDU)

Agilent seconds.

Friendly amendments:

ISER shall support a new iSCSI login key that requires the Initiator to fill all non-last unsolicited data PDUs in an iSCSI data sequence to a negotiated, fixed size (including immediate data and DATAOUT PDUs). The key shall be named FullSendDataSegmentLength.

Friendly amendment(s) accepted

Motion passes by acclamation.

Intel moves: We approve the “Solicited Data Handling in iSER v0.7” slide deck as modified in the meeting.

HP seconds.

Motion passes by acclamation.


Solicited Data Handling in iSER v0.7

Hemal Shah
Mike Ko
Uri Elzur
October 9, 2002

Solicited Data Handling

- iSCSI-R Target initiates solicited data transfer for both SCSI write and SCSI reads
- iSER layer on the initiator is not involved in solicited data transfer
- iSER layer on the initiator is responsible for advertising the STag corresponding to a SCSI buffer used for a SCSI write or a SCSI read
- Solicited data for SCSI writes are handled using RDMA Read operation(s)
 - Each R2T FDU is transformed into a RDMA Read operation
 - No Data-out FDU's are generated at the initiator
- SCSI reads are handled using RDMA Write operation(s)
 - All SCSI read data is implicitly solicited by command
 - Each Data-In FDU is transformed into a RDMA Write operation

Solicited Data Transfer for a SCSI Write

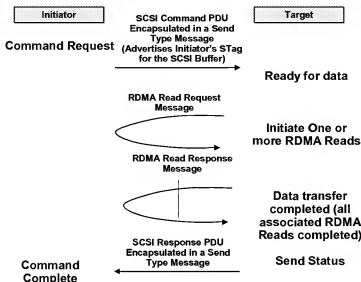


iSCSI-R Mapping

Slide 3

Handling of SCSI Command PDU for SCSI Write

• iSCSI-R initiator actions:

- iSER layer at the initiator receives SCSI Command RDU in Send_Control primitive from the iSCSI layer
- iSER layer at the initiator associates an STag to the SCSI buffer used for the solicited data and places it in the Write STag field of the iSER header
 - e.g. iSER uses a pre-allocated STag and uses Send and Register verbs to configure registration with Send Type operation
- SCSI command RDU containing the write command is embedded in a Send Type Message (Message Payload as shown in the following figure)
 - Case 1: No solicited data transfer is required

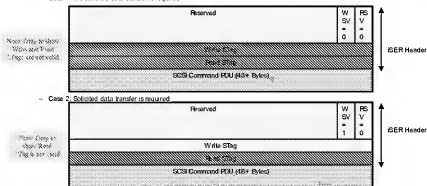

• iSCSI-R target actions:

- Upon receiving the Send Type Message containing SCSI command PDU, iSER layer on the target notifies iSCSI layer using Control_Notify primitive
 - iSER layer makes an association of Write STag and RT on this connection
 - iSER layer only passes SCSI command RDU to the iSCSI layer

iSCSI-R Mapping

Slide 4

Handling of R2T for SCSI Write


- iSCSI-R target actions:
 - Target uses Get_Data primitive one or more times to complete data transfer
 - The following steps are performed for each Get_Data operation:
 - For solicited data, when a buffer becomes available, the target iSCSI layer uses Get_Data primitive (containing R2T PDU) to notify iSER layer
 - After receiving Get_Data primitive, the target iSER layer, issues an RDMA Read request (combined with local register and deregister)
 - Write Stag corresponding to the ITT in R2T PDU is used as Data Source Stag
 - Buffer Offset field of R2T PDU is used as Data Source TO
 - Desired Data Transfer Length field of R2T PDU is used as Size for RDMA Read operation
 - iSER layer associates R2TSN with this RDMA Read operation
 - Upon completion of every RDMA read operation, iSER layer notifies the iSCSI layer using Data_Completion_Notify primitive that includes ITT and R2TSN
- iSCSI-R Initiator Actions:
 - iSER and iSCSI layers at the initiator are not involved in the data transfer associated with the R2T
 - RDMA Read Response Message carries solicited SCSI data

iSCSI-R Mapping

Slide 5

Handling of SCSI Response PDU for SCSI Write

- iSCSI-R Target Actions:
 - iSER layer at the target receives SCSI Response PDU in Send_Control primitive from the iSCSI layer
 - SCSI Response PDU from the target is embedded in a Send Type Message (Message Payload as shown in the the following figures)
 - iSER Header followed by SCSI Response PDU




- iSCSI-R initiator actions:
 - Upon receiving the Send Type Message containing SCSI Response PDU, iSER layer on the initiator notifies iSCSI layer using Control_Notify primitive

iSCSI-R Mapping

Slide 6

SCSI Read Data Transfer

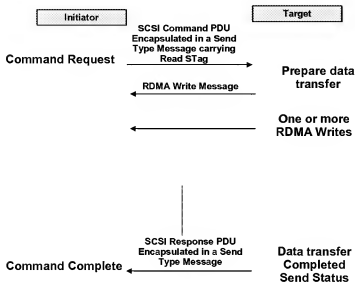


iSCSI-R Mapping

Slide 7

Handling of SCSI Command PDU for SCSI Read

iSCSI-R Initiator Actions:

- iSER layer at the initiator receives SCSI Command PDU in Send_Control primitive from the iSCSI layer
- iSER layer at the initiator associates an STag to the SCSI buffer used for the solicited data and places it in the Read STag field of the iSER header
 - e.g. iSER uses a pre-allocated STag and uses Send and Register verb to combine registration with Send Type operation
- SCSI command PDU from the initiator containing the read command is embedded in a Send Type Message (Message Payload as shown in the following figure)



iSCSI-R Target Actions:

- Upon receiving the Send Type Message containing SCSI command PDU, iSER layer on the target notifies iSCSI layer using Control_Notify primitive
 - iSER layer makes an association of Read STag and ITT on this connection
 - iSER layer only passes SCSI command PDU to the iSCSI layer

iSCSI-R Mapping

Slide 8

Handling of RDMA Write for SCSI Read


- iSCSI-R Target Actions:
 - For solicited data, when the data becomes available, the target iSCSI layer uses Put_Data primitive to notify iSER layer
 - Target performs one or more Put_Data operations to complete the data transfer
 - For each Put_Data:
 - After receiving Put_Data primitive, the target iSER layer, issues an RDMA Write command
 - Read STag received from the initiator in SCSI command PDU is used as the STag for RDMA Write
 - Buffer Offset field of SCSI Data-In PDU is used as IO
 - DataSegmentLength field of SCSI Data-In PDU is used as Size for RDMA Write operation
 - iSER layer associates DataSN with this RDMA Write operation
 - Upon completion of every RDMA write operation, iSER layer notifies the iSCSI layer using Data_Completion_Notify primitive that includes ITT and DataSN
- iSCSI-R Initiator Actions:
 - iSER and iSCSI layers at the initiator are not involved in the data transfer
 - RDMA Write Message carries solicited SCSI data

iSCSI-R Mapping

Slide 9

Handling of SCSI Response PDU for SCSI Read

- iSCSI-R Target Actions:
 - iSER layer at the target receives SCSI Response PDU in Send_Control primitive from the iSCSI layer
 - SCSI Response PDU from the target is embedded in a Send Type Message (Message Payload as shown in the the following figures)
 - iSER Header followed by SCSI Response PDU




- iSCSI-R initiator actions:
 - Upon receiving the Send Type Message containing SCSI Response PDU, iSER layer on the initiator notifies iSCSI layer using Control_Notify primitive

iSCSI-R Mapping


Slide 10

Bi-directional Commands

- For Bi-directional commands (SCSI read and SCSI Write), the solicited data transfer is handled in a similar fashion
 - For SCSI read part, same as described on Slide 9 and for SCSI write part, same as described on Slide 5
- Message Payload of Send Type Message carrying SCSI command FDU
 - Case 1: SCSI Write requires solicited data transfer



- Case 2: SCSI Write does not require solicited data transfer



- SCSI Response is handled in a similar fashion as described on slide 6 or slide 10

iSCSI-R Mapping

Slide 11

Type of Messages and Invalidation of STags

- Initiator shall use Send with SE for carrying SCSI command FDU
- If there were no STags advertised (W SV=RSV=0 in iSER header) in the Send with SE Message containing SCSI command FDU
 - Target shall use Send with SE Message for carrying the SCSI Response FDU
- If Write STag and/or Read STag were advertised in the Send with SE Message containing SCSI command FDU
 - Target shall use Send with Invalidate and SE Message for carrying the SCSI Response FDU
- If Read STag was advertised (RSV=1 in iSER Header) in the Send with SE Message carrying SCSI command FDU, then Send with Inv. and SE carrying SCSI Response FDU shall have Read STag in the RsvdULP field of the DDP Header
- If Write STag was advertised and Read STag was not advertised (W SV=1, RSV=0 in iSER Header) in the Send with SE Message carrying SCSI command FDU, then Send with Inv. and SE carrying SCSI Response FDU shall have Write STag in the RsvdULP field of the DDP Header
- Receive completion event corresponding to Send with Inv. and SE provided to iSER shall include the value of the invalidated STag

iSCSI-R Mapping

Slide 12

Type of Messages and Invalidation of STags

- Initiator shall use Send with SE for carrying SCSI command FDU
- If there were no STags advertised (W SV=RSV=0 in iSER header) in the Send with SE Message containing SCSI command FDU
 - Target shall use Send with SE Message for carrying the SCSI Response FDU
- If Write STag and/ or Read STag were advertised in the Send with SE Message containing SCSI command FDU
 - Target shall use Send with Invalidate and SE Message for carrying the SCSI Response FDU
- If Read STag was advertised (RSV=1 in iSER Header) in the Send with SE Message carrying SCSI command FDU, then Send with Inv. and SE carrying SCSI Response FDU shall have Read STag in the RsvdUPL field of the DDP Header
- If Write STag was advertised and Read STag was not advertised (W SV=1, RSV=0 in iSER Header) in the Send with SE Message carrying SCSI command FDU, then Send with Inv. and SE carrying SCSI Response FDU shall have Write STag in the RsvdUPL field of the DDP Header
- Receive completion event corresponding to Send with Inv. and SE provided to iSER shall include the value of the invalidated STag

iSCSI-R Mapping

Slide 12

IBM moves:

An iSCSI-R enabled node must initiate the iSER support negotiation during iSCSI login if it wants the connection to be in iSER mode; however it is not required to do so if it prefers the connection to be in iSCSI-v1 mode

EMC seconds.

Motion passes by acclamation.

EMC moves: RDMAExtension key is not applicable in a discovery session and is marked “irrelevant”.

IBM seconds.

Motion passes by acclamation.

Broadcom moves: The RDMAExtension key should be negotiated before any login parameters which may be affected by the mode selection.

IBM seconds.

Pat: Friendly amendment should-> shall.

The RDMAExtension key shall be offered only on the initial login request PDU or login response PDU of the leading connection, and if offered the response shall be sent in the first available login response or login request PDU. The key shall precede any login parameters which may be affected by the mode selection.

Friendly amendments accepted.

Motion passes by acclamation.

HP moves: iSER shall not provide a CRC beyond what MPA provides, and iSER requires that iSCSI must negotiate the header digest and data digest to be negotiated None.

EMC seconds.

Motion passes by acclamation.

Microsoft moves: October 29, 2002 is the feature proposal freeze date for storage verbs.

HP seconds.

IBM votes no.

Motion passes.

RSTG-mtg-021014-jc.doc

HP motions that we adopt approach A for realizing iSCSI data ACKs when the operational ErrorRecoveryLevel is 2 for an iSCSI connection.

Broadcom seconds

Motion passes by acclamation

Updated slide is as follows (Data_Ack_in_iSER_v0.3.ppt)



Data acks with ErrorRecoveryLevel=2

- An equivalent of iSCSI Data ACK (for connection recovery) may be provided in one of the following ways (In all approaches, targets treat either the received Send Message or the Read completion semantically identical to an explicit iSCSI data ack) –
 - A. Mandate a zero-length RDMAP Read following every RDMAP Write that the target wants acknowledged. A Read Response signals remote completion of all preceding RDMAP Writes. The zero-length RDMAP Read, if issued, must be issued before the status for the SCSI command is sent.
 - > An additional option to carry out, but requires no enhancements to RDMAP protocol
 - B. Propose enhancements to RDMAP to automatically generate a Send Message from the Data Sink on receiving the concluding DDP Segment of an RDMAP Write Message (Perhaps only for a new opcode "RDMAP Write w/ response"? Or perhaps on a new bit in the RDMAP header?) that echoes the RDMAP header of that (doesn't have to be the last) DDP Segment.
 - > Enhancements to RDMAP Protocol. It also does imply additional RNIC state as well
 - C. Propose a "Message reflector" QN that simply echoes any Send Message directed to it. Target sends a Send message to this QN after every RDMAP Write it wants acknowledged.
 - > Any protocol requiring a data ACK could employ this generic RNIC facility. But are there others?
 - > Expensive to support an additional QN?
 - D. iSER on the target issues an ACKRequest Send message that carries a per-task Ack/SN counter. iSER on the initiator simply responds back with an ACKResponse echoing the same payload. By definition, all the preceding posted RDMAP Writes must have completed when ACKRequest is processed, so the ACKResponse acknowledges all those.
 - > Initiators running iSER in software (i.e. generic RNIC) would take an addl. Interrupt to process each ACKRequest. Also implies additional code state in the iSER layer to manage the data ACKs.

Votable: HP motions that we adopt approach A for realizing iSCSI data ACKs when the operational ErrorRecoveryLevel is 2 for an iSCSI connection.

V0.3 Slide 3 October 14, 2002

HP motions that the legal behavior to realize iSCSI data acks on iSER targets be as described on slides 5, 6 and 7.

Broadcom seconds

Motion passes by acclamation

Updated slides 5, 6, and 7 are as follows (Data_Ack_in_iSER_v0.3.ppt)



iSER realization of data acks - 1

- This slide summarizes the semantic behavior expected of iSER to realize iSCSI Data Acks, when the operational `ErrorRecoveryLevel` of an iSCSI connection is 1.
- On the `Put_Data` invocation from the iSCSI layer for a SCSI Data-In FDU with the A-bit set to 1, the iSER layer shall do the following—
 - a) Originate an RDMA Write Message that moves the data contained in the data segment of the SCSI Data-In FDU to the appropriate Data Sink buffer on the initiator. The local completion event of sending this RDMA Write Message must result in a `Data_Completion_Notify` back to the local iSCSI layer as per the semantics defined in the DI draft.
 - b) The local completion event of sending this RDMA Write Message must also result in a `Data_ACK_Notify` back to the local iSCSI layer as per the semantics defined in the DI draft.

V0.3 Slide 1 October 14, 2002



iSER realization of data acks - 2

- This slide summarizes the semantic behavior expected of iSER to realize iSCSI Data Acks, when the operational `ErrorRecoveryLevel` of an iSCSI connection is 2.
- On the `Put_Data` invocation from the iSCSI layer for a SCSI Data-In FDU with the A-bit set to 1, the iSER layer shall originate the following RDMA Operations in this order –
 - a) An RDMA Write Message that moves the data contained in the data segment of the SCSI Data-In FDU to the appropriate Data Sink buffer on the initiator. The local completion event of sending this RDMA Write Message must result in a `Data_Completion_Notify` back to the local iSCSI layer as per the semantics defined in the DI draft.
 - b) A zero-length RDMA Read Message that is directed to the same initiator STag representing the Data Sink buffer. The RDMA Read Response reception event in the iSER layer must in turn cause a `Data_ACK_Notify` back to the local iSCSI layer as per the semantics defined in the DI draft.

V0.3 Slide 6 October 14, 2002



iSER realization of data acks - 3

- Target iSER implementations may choose to always realize the iSCSI Data ack functionality using the model described for ErrorRecoveryLevel=2 – i.e. regardless of the operational ErrorRecoveryLevel.
- The choice to implement beyond what's minimally required for ErrorRecoveryLevel=1 could be made by a target for the following reasons: iSER code path simplicity, desire to not maintain the state of operational ErrorRecoveryLevel in iSER. Note that the negotiation of the ErrorRecoveryLevel key itself is done during the iSCSI level login, **not** at the iSER level.

Votable: HP motions that the the legal behavior to realize iSCSI data acks on iSER targets be as described on slides 5, 6 and 7.

V0.3 Slide 7 October 14, 2002

HP motions to approve this slide deck (Error_handling_recover_v0.30.ppt)

Intel seconds

Motion passes by acclimation

Slide deck is as follows (Error_handling_recover_v0.30.ppt)



iSER Error handling and Recovery

John Hufferd
Mallikarjun Chadalapaka

V0.30 Slide 1 October 10, 2002



Data integrity & Error recovery

- This slide set proposes how iSCSI/ iSER should realize the error management hierarchy as defined in the iSCSI specification.
- iSER by virtue of running iWARP (unlike the original iSCSI) has the advantage that a robust (MPA) CRC-assisted error detection mechanism is available in the transport layer. In the iWARP context, it's reasonable to presume that the error rate would be extremely low (compared to original iSCSI that operated on 16-bit checksum-assisted TCP).
- Because of this reason, the storage subteam had already unanimously voted to mandate that iSCSI/ iSER MUST negotiate HeaderDigest and DataDigest to be None.
- Given this context, the proposal is that
 1. FDUlevel recovery be not a design consideration for iSER. iSCSI clearly defines all the expected protocol interactions around FDUlevel recovery today, it's not an iSER issue.
 - SNACK/ recovery R2T operations (if issued inadvertently by the iSCSI layer), could be supported by iSER with no distinction (via the standard Send_Control and Get_Data Operational Primitive interface).
 2. iSCSI connection recovery must be supported.

V0.30 Slide 2 October 10, 2002



ErrorRecoveryLevel semantics for iSER

- The proposed iSCSI/ iSER protocol behavior corresponds to the following error management hierarchy.

ErrorRecoveryLevel	Implies	iSER support	Comments
0	Session recovery	Yes	Default mode of operation
1	FDU recovery	Yes	Supported with no addl. cost with iSCSI/ iSER because digest/ sequence errors never happen, timeout-driven proactive SNACK SHOULD however be disabled (not useful anyway), but iSCSI already has the protocol to deal with these SNACKs if it does happen.
2	Connection recovery	Yes	Supported. iSER in conjunction with iSCSI on the target will drive all pending/ failed RDMA operations on the new connection upon reassignment (described later).

V0.30 Slide 3 October 10, 2002



Connection recovery

- Connection recovery refers to reassigning the connection allegiance of an active task to a different iSCSI connection, upon the failure of the original connection the task was allegiant to.
- SCSI Write
 - At the time the original connection failed, iSCSI layer knows how many write data sequences have been successfully fetched based on which RDMAC Read operations the local iSER layer successfully completed so far (as indicated by the Data_Completion_Notify invocations).
 - Upon accepting a reassignment request for a SCSI Write command, iSCSI/ iSER target issues the Get_Data Operational Primitive calls (R2T PDUs) for the pending write data sequences to be received. iSER layer translates each Get_Data into an RDMAC Read operation, to eventually result in a corresponding invocation of Data_Completion_Notify.
 - Eventually, iSCSI layer normally concludes the task by sending the status.
- SCSI Read
 - An iSCSI/ iSER initiator MUST issue a task reassignment request with ExpDataSN=0 (which means "send me all unacknowledged data" to the target iSCSI layer). This is the only appropriate choice for iSCSI/ iSER initiators because the data transfer and even the data acknowledgements happen completely transparent to iSCSI initiator layer.
 - Upon accepting a reassignment request for a SCSI read command, an iSCSI/ iSER target issues Put_Data Operational Primitive calls (SCSI Data-In PDUs) for all unacknowledged data. This may result in the entire read data for the I/O getting transferred again if data acks were not employed for the command. iSER layer translates each Put_Data into an RDMAC Write operation, to eventually result in a corresponding invocation of Data_Completion_Notify.
 - Eventually, iSCSI layer normally concludes the task by sending the status.

V0.30 Slide 4 October 10, 2002



Connection recovery (contd.)

- When a task is reassigned to a new iSCSI connection, the iSER layer on the initiator MUST specify the valid STag(s) (none, one or two) in the iSER header as applicable on the new connection as it did when the command was initially issued, and set the W/SV and the RSV bits correspondingly.
- When a task is reassigned to a new iSCSI connection, the iSER layer on the target MUST consider the valid STags (none, one or two, as denoted by the W/SV and RSV bits), if any, in the iSER header as the newly applicable initiator STag(s) for the task on the new connection. The target MUST discard the STag(s), if any, that have been valid for the task until that point of time.
 - In other words: Need to have iSER Target layer relate the valid STags with the ITT, replacing the previous ITT relationship always (unconditionally) changes the ITT-STag association without the knowledge of the underlying iSCSI PDU.

V0.30 Slide 5 October 10, 2002

RSTG-mtg-021023-pat.doc

Moved by Broadcom: Queuing of outstanding RDMA Read operation beyond the peer's RDMA Read Request Queue depth should be done at iSER.

Second: HP

Passes by acclamation

RSTG-mtg-021028-jw.doc

Broadcom moves - The transition from iSCSI on TCP to iSER happens on the same connection iSCSI was negotiated on and other options are going to be eliminated.

IBM Seconds

Friendly amendment – remove “and other options are going to be eliminated”

Broadcom accepts amendment

IBM accepts amendment

Updated motion – The transition from iSCSI on TCP to iSER happens on the same connection iSCSI was negotiated on.

Motion passes by acclamation

Broadcom moves - Initiator's inbound RDMA Rd request Queue size, will be set locally and declared to the Target during iSER mode.

IBM seconds

Further Discussion

IBM friendly amendment - Initiator's inbound RDMA Rd request Queue size, will be set locally and declared to the Target during iSER mode for each connection.

Broadcom accepts amendment

IBM accepts amendment

Motion passes by acclamation

RSTG-mtg-021030-mk.doc

Broadcom motions: In transition from iSCSI to iSER the QP setup and resource allocation will be handled during iSCSI login negotiation

EMC seconds

Motion passes by acclamation

RSTG-mtg-021104-hvs.doc

IBM motions that we adopt the key definitions on slide 6.

EMC seconds.

Any further discussion?

No abstentions.

Motion passes by acclamation.

Slide 6 is as follows (RDMAC_FullSendDataSegmentLength_v32.ppt):

FullSendDataSegmentLength Key (Option 2)

- Use: IO (initialize only)
- Senders: Initiator and Target
- Scope: CO (connection-only)
- Irrelevant when: RDMAExtension=No
- FullSendDataSegmentLength=<numerical-value-512-to-(2²⁴-1)>
- Default is 8192 bytes
- Value function is Min
- This key is relevant only for a leading connection if the RDMAExtension key is negotiated to "Yes", or for a non-leading connection where RDMAExtension was previously negotiated to "yes". It is used by the initiator and the target to negotiate the size of the data segments in all non-fast iSCSI PDUs containing unsolicited data. The initiator MUST send all non-fast iSCSI PDUs containing unsolicited data with a data segment of exactly FullSendDataSegmentLength size whenever the PDUs constitute a data sequence whose size is larger than FullSendDataSegmentLength.

Also, add to MaxRecvDataSegmentLength:

- Irrelevant when: RDMAExtension=Yes

iSCSI-R Mapping

Slide 6

RSTG-mtg-021106-pat.doc

HP moves that we accept the iSER-floating-credit-v0.5.ppt as the flow control mechanism for iSER.

Broadcom seconds.

Passes by acclamation

Slide deck is as follows (iSER-floating-credit-v05.ppt):

iSER Send Type Message Floating-Credit Flow Control

v0.5

Jm Wendt

Hemal Shah

Mallikarjun Chadalapaka

Pat Thaler


November 6, 2002

Floating-Credit Flow Control Summary

- 1) iSER shall flow control all Send Type Messages (Untagged Buffers) between Data Source and Data Sink
- 2) iSER shall flow control in both directions (Initiator-to-Target and Target-to-Initiator)
- 3) iSER flow control shall be per iSER Connection (e.g. RDMAP Stream)
- 4) One flow control credit shall correspond to one Send Type Message (e.g. one Untagged Buffer)
- 5) One Send Type Message sent from Data Source to Data Sink shall consume one credit
- 6) Data Sink shall grant credits to the Data Source by sending an additive number of credits to the Data Source.
- 7) Data Source shall maintain an absolute count of available credits at the Data Sink for receiving Send Messages
- 8) Data Source shall reserve its last available credit for granting credit to the Data Sink (i.e. reverse direction credits)
- 9) Data Sink can request the Data Source to return its unused credits except for a specific number of retained credits which must be at least one. If the Data Source has less than the retained number of credits then no credits are returned.
- 10) Data Sink may return unused credits to the Data Source by sending one zero-length Send Type Message for each credit being returned to Data Sink
- 11) The last Send Type Message in a series of returned unused credits should be a SendSE or SendInvSE
- 12) During initialization, a Data Sink shall post at least one untagged receive buffer large enough to receive an initial message from the Data Source granting credit

35 of 2

Flow Control Fields in iSER Header



Note: The final location of the credit mgmt fields in the iSER header are TBD


Credit Op subfield (2 bits)	Credit Param subfield (12 bits)
00 = No credit operation	Sender sets to 0 / receiver ignores
01 = Grant-Credit	Granted Credit = Number of additional (additive) credits given to the Data Sink by the Data Source (1 to $2^{12}-1$)
10 = Retain-Credit	Retained Credit = Maximum number of absolute credits to be retained by the Data Source after returning all other credits to the Data Sink (1 to $2^{12}-1$)
11 = reserved	reserved

- If no iSCSI PDU (or iSER control PDU) is being sent in this message, then

- The length of the iSER PDU is the length of the iSER fixed header
- The Write Stag and Read Stag fields are N/A (WSV=0 / RSV=0)

Slide 3

Flow Control Exchanges

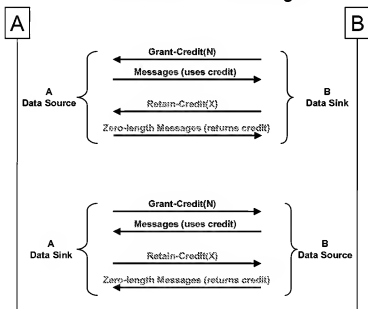

Slide 4

Grant Credit - Data Sink to Data Source

- Grant-Credit (Data Sink to Data Source)
 - Used by the Data Sink to grant credit to the Data Source
 - The number of credits granted to the Data Source is an additive amount
 - Data-Sink actions:
 - Set iSER Header <Credit Op> to "Grant-Credit"
 - Set iSER Header <Granted Credit> to number of additional credits given to Data-Source
 - If piggybacking on an existing FDU going from Data Sink to Data Source:
 - Transfer iSER FDU to Data Source
 - If sending as a separate message from Data Sink to Data Source:
 - Set iSER Header WSV and RSV to zero
 - Transfer iSER Header-only FDU to Data Source
 - Data-Source actions:
 - Add <Granted Credit> value to an absolute count of available credits (Max-Retained-Credits) on Data-Sink
 - The maximum absolute count of credits which the Data Source can accumulated is limited to $2^{12}-1$

Slide 5

Use Credit - Data Source to Data Sink

- Use Credit (Data Source to Data Sink)
 - One credit is used for each Send Type Message transferred from the Data Source to the Data Sink
 - Data Source actions:
 - Decrement by one the absolute count of available credits for sending messages to the Data Sink
 - Data Source shall only use its last available credit to the Data Sink if it is granting more than zero credit to the Data Sink (i.e. reverse direction credits)
 - Data Sink actions:
 - Receive one used credit from the Data Source

Slide 6

Retain Credit – Data Source to Data Sink

- Retain-Credit Request (Data Sink to Data Source)
 - Used by the Data Sink to request that the Data Source retain a certain number of credits and return the remaining credits currently owned by the Data Source to the Data Sink.
- Data Sink actions:
 - Set ISER Header <Credit Op> to "Retain Credit"
 - Set ISER Header <Retained Credits> to number of credits the Data Source is to retain after returning all other credits to the Data Sink
 - If piggybacking on an existing FDU going from Data Sink to Data Source:
 - Transfer ISER FDU to Data Source
 - If sending as a separate message from Data Sink to Data Source:
 - Set ISER Header WSV and RSV to zero
 - Transfer ISER Header-only FDU to Data Source
 - Data Sink must allow at least one retained credit on the Data Source (for sending a reverse channel Grant Credit message)
- Data Source actions:
 - Send all currently owned credits (at time of processing the Retain-Credit) less the number of <Retained Credits> to the Data Sink by sending one zero-length Send Message or one other Send Type Messages containing an ISER FDU for each credit being returned to the Data Sink
 - If currently owned credits are less than <Retained Credits> then no credits are returned
 - Reduce the absolute count of available credits (Max-Retained-Credits) on Data-Sink by number of credits returned

Slide 7

Return Credit – Data Source to Data Sink

- Return Credit (Data Source to Data Sink)
 - The Data Source may return unused credits to the Data Sink by sending zero-length Send Messages
- Data Source actions:
 - Send one zero-length Send Message or one Send Type Message with an ISER FDU to the Data Sink for each credit being returned to the Data Sink
 - The last Send Type Message in a series of returned unused credits should be a SendSE or SendInvSE
 - The Data Source should return unused credits upon receiving the Retain-Credit request rather than waiting for the need to send an actual ISER FDU
- Data Sink action:
 - Receive one returned credit from the Data Source for each Send Type Message

Slide 8

Bidirectional Flow Control

- Each node functions as both a Data Source and a Data Sink
- All flow control operations occur in both directions between two nodes
- All messages, including flow-control messages, consume one credit at the receiving node, including:
 - iSER Header-only Grant-Credit messages
 - iSER Header-only Retain-Credit messages

Slide 9

Initialization

- At initialization, the Data Sink shall post one untagged receive buffer for receiving an initial Grant Credit from the Data Source

Slide 10

RSTG-mtg-021115-jw.doc

HP motions that we accept the stg_iSER-connect-v07.ppt slide deck with the following change – Replace all occurrences of MAY/MUST with MAY, there are three such occurrences in the slide deck, and accept option.2 on slide 3.

Broadcom seconds

Any objections, discussion, abstentions? None.

Motion passes with acclamation.

<Updated slide deck: stg_iSER-connect-v1.ppt>




iSER Connection Setup *v1*

Uri Ezur - Broadcom
Jim Wendt - HP
Malikarjun Chadalapaka - HP

Slide 1 November 12, 2002

1

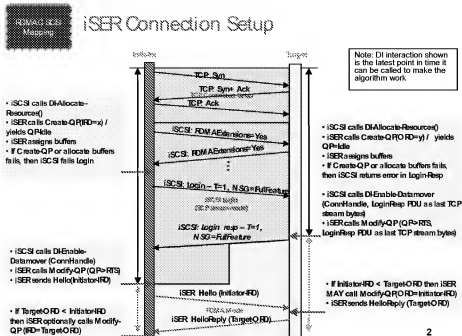

RDMAC SCSI Mapping Options for Target's setting of ORD

1) If Initiator-IRD < Target-ORD then:

1) iSER **MUST** call Modify-QP(ORD=Initiator-IRD)

• Pro:

– Provides an additional safeguard (at the RNIC level) that Initiator-IRD won't be exceeded

• Con:

– Requires that all target implementations have the ability to modify ORD on RNIC (specifically when QP is in RTS state)

– It is unnecessary to modify the target's ORD because iSER ensures that no more than Initiator-IRD RDMA Read Requests will be issued to the RNIC at any given time

2) iSER **MAY** call Modify-QP(ORD=Initiator-IRD)

• Pro:

– Implementations don't have to support modification of ORD on RNIC

– Specifies only the minimum required behavior for the protocol


• Con:

– Less protection against a faulty iSER implementation (minor)

Voted on 11/15/02 to accept option 2)



iSER Connection Setup – Verb-Free Version

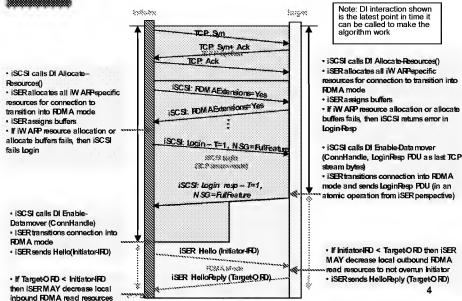

Initiator-IRD and Target-ORD Handling

- Initiator
 - Send Initiator-IRD in Hello to Target
- Target
 - If Initiator-IRD < Target-ORD
 - then Target ISER MAY call Modify-QP(ORD=Initiator-IRD)
 - Send Target-ORD in HelloReply to Initiator
- Initiator
 - If Target-ORD < Initiator-IRD
 - then Initiator ISER MAY call Modify-QP(IRD=Target-ORD)
- Target
 - Target MUST NOT issue more RDM A Read Requests than the value of Initiator-IRD as agreed to by both sides after the Hello and HelloReply exchange

IBM motions that we accept the slide deck
(Init_time_Datamover_Interactions_v0.30.ppt)

HP seconds

Further discussion - none

Vote against - none

Abstain - none

Motion passes by acclimation

<Slide deck: Init_time_Datamover_Interactions_v0.30.ppt>



Init-time & Shutdown-time - Datamover Interfaces

John Hufford
Mallikarjun Chadalapaka

V0.30 Slide 1 November 04, 2002




Problem statement

- The storage subgroup had already taken the binding vote that the conclusion of iSCSI login phase (i.e. the final Login Response in streaming mode from the iSCSI target) transitions the connection into the RDMA mode.
- At least one of the resources that ought to be acquired by both sides before signaling the Login as complete is iWARP-specific, the QP (with an associated RQ depth). This is a resource that is completely in the knowledge domain of the Datamover layer, but ideally should be allocated before the iSCSI login phase completes.
- The current DI draft (rev 0.5) does not define Operational Primitives to cater to these init time (aka "preSER") interactions between the iSCSI layer and Datamover layer.
- We can choose to not model these interactions in DI, to leave them as implementation-specific. The downside is that DI will not then reflect the minimally required architectural requirements for Datamover operation. Besides, this resource allocation is really a generic issue that any hypothetical Datamover (other than iSER) would need to address. But we should be careful **not** to over-specify all implementation-specific exchanges that happen between the layers (such as error handling etc.) that aren't pertinent to Datamover protocol operation.
- **Votable: HP motions that the init time interactions between iSCSI and a Datamover be modeled in DI.**

V0.30 Slide 2 November 04, 2002



Initiator's usage: Proposed new Primitives

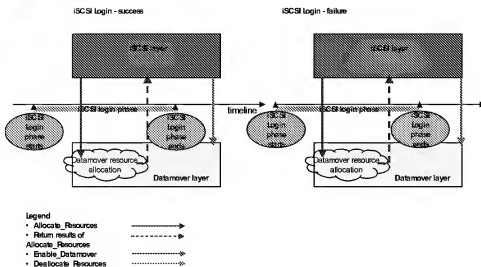


V0.30 Slide 3

November 04, 2002



Initiator's usage: Proposed new Primitives

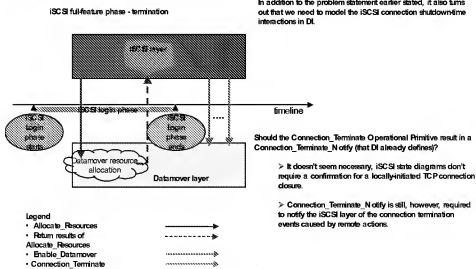


V0.30 Slide 4

November 04, 2002

REIMAG SCSE Mapping

Target's usage: Proposed new Primitives

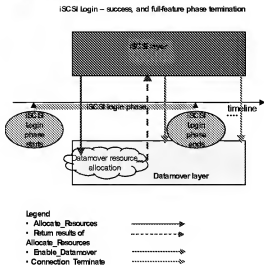

WD-30 Slide 5

November 04, 2002

FEMAC 30S®
Mapping

Proposed semantics

- **Allocate_Resources**
 - Input qualifiers are: Connection_Handle, Resource_Descriptor (implementation-dependent, i.e. structurally opaque to DI)
 - This Operational Primitive is meant to request the Datamover layer that it perform all the Datamover-specific resource allocations required for an operational iSCSI connection. The handle identifies the connection the iSCSI layer is requesting the resource allocation for, to eventually transition the connection to be a Datamover-accelerated iSCSI connection.
 - Return results: Status
 - Status=0 means that the Allocate_Resources invocation corresponding to that Connection_Handle succeeded. Status!=0 means that the Allocate_Resources invocation corresponding to that Connection_Handle failed. There MUST NOT be more than one Allocate_Resources Primitive outstanding for a given Connection_Handle at any time.
- **Enable_Datamover:**
 - Input qualifiers are:
 - Connection_Handle, TCP_Connection_Descriptor [, Final_Login_Response_FDU]
 - This Operational Primitive requests the Datamover layer to accelerate all further iSCSI exchanges on the iSCSI connection identified by the Connection_Handle, for which the Datamover resource allocation was earlier made. The TCP connection associated to the Connection_Handle is specified in the TCP_Connection_Descriptor (aka TCID).
 - The Final_Login_Response_FDU input qualifier is valid only for a target, and contains the final Login_Response which must be sent as a TCP byte stream, as expected by the traditional iSCSI, before the Datamover acceleration is enabled for the TCP connection.

VO 30 Slide 6

November 04, 2002



Proposed semantics

- **TCP_Connection_Descriptor** is an information element that identifies a specific TCP connection to the Datamover layer. The exact structure of this Descriptor is implementation-dependent.
- **Deallocate_Resources:**
 - Input qualifier is: **Connection_Handle**
 - This Operational Primitive is meant to request the Datamover layer that it deallocate all the Datamover-specific resource allocations that were earlier made for the **Connection_Handle**.
- **Connection_Terminate:**
 - Input qualifier is: **Connection_Handle**
 - This Operational Primitive requests the Datamover layer to terminate the LLP connection and deallocate all the resources associated with the **Connection_Handle**.

V0.30 Slide 7 November 04, 2002

RSTG-mtg-021204-TT.doc

IBM moves we reopen the discussion of the FullSendDataSegmentLength in the 11/04 vote.

Intel seconds

Vote against - none

Abstain - none

Absent - Agilent

Motion passes by acclamation

IBM moves that we overturn the vote on 11/4 entitled "FullSendDataSegmentLength Key (Option 2)".

Intel seconds

Vote against - none

Abstain - none

Absent - Adaptec

Motion passes

Agilent moves that Option 2 be adopted : "SCSI Writes use one data descriptor".

IBM seconds


Vote against - none

Abstain - Adaptec

Motion passes



Data descriptors for Option 2

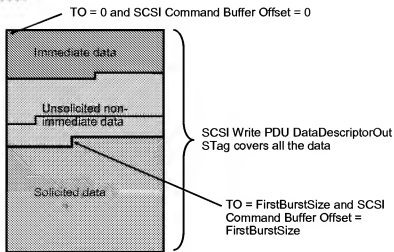

Slide 1

RSTG-mtg-021209-jc.doc

IBM Motions to accept option 3 and the related keys as presented in slide 7, 8, 9, & 10 of the slide deck (senddatasegmentlength_v3.ppt)

Agilent seconds

Vote against - none

Abstain - Adaptec, NetApp

Motion passes

Option 3: The New Key Replaces MRDSL Only for iSCSI Command PDUs & iSER Data-type PDUs

- Only SCSI Command PDUs and SCSI Data-out PDUs are affected at the initiator
 - Existing iSCSI implementation for other iSER control-type PDU besides SCSI Command PDU and SCSI Data-out PDU continue to use MRDSL at the initiator side
 - The iSCSI layer need not send all control-type PDUs with a size exactly equal to FSDSL if the size of the data sequence exceeds FSDSL
 - The other control-type PDUs are not used as frequently as SCSI Data-out
 - Their impact on receive buffer memory management is not as critical
- Only SCSI Data-in PDUs are affected at the target
 - Existing iSCSI implementation for other iSER control-type PDU besides SCSI Data-in PDU continue to use MRDSL at the initiator side
 - The iSCSI layer need not send all control-type PDUs with a size exactly equal to FSDSL if the size of the data sequence exceeds FSDSL
 - The other control-type PDUs are not used as frequently as SCSI Data-in
 - Their impact on receive buffer memory management is not as critical
- Proposal:
 - Change FSDSL to TargetRecvDataSegmentLength for the initiator
 - Add InitiatorRecvDataSegmentLength for the target
 - TargetRecvDataSegmentLength supercedes target MRDSL in the full feature phase for SCSI Data-out PDUs only
 - InitiatorRecvDataSegmentLength supercedes initiator MRDSL in the full feature phase for SCSI Data-in PDUs only
 - Target MRDSL at the target and initiator would be set to the value of TargetRecvDataSegmentLength in the full feature phase
 - Initiator MRDSL at the initiator and target would be set to the value of InitiatorRecvDataSegmentLength in the full feature phase
- Pro:
 - Less impact to existing iSCSI implementation
- Con:
 - Potentially less than optimal receive buffer memory utilization for the other iSER control-type PDUs which are affected by MRDSL

Slide 1

TargetRecvDataSegmentLength Key

- Use: IO (initialize only)
- Senders: Initiator and Target
- Scope: CO (connection-only)
- Irrelevant when: RDMAExtensions=No
- TargetRecvDataSegmentLength=<numerical-value-512-to-(2**24-1)>
- Default is 8192 bytes
- Result function is Min
- This key is relevant only for the iSCSI connection of an iSCSI session if RDMAExtensions=Yes was negotiated in the leading connection of the session. It is used by the initiator and the target to negotiate the size of the data segments in SCSI Command PDUs and SCSI Data-out PDUs for non-Final iSCSI PDUs to be sent by the initiator. The initiator MUST send all such non-last iSCSI PDUs with a data segment of exactly TargetRecvDataSegmentLength size whenever the PDUs constitute a data sequence whose size is larger than TargetRecvDataSegmentLength.

Slide 1

InitiatorRecvDataSegmentLength Key

- Use: IO (initialize only)
- Senders: Initiator and Target
- Scope: CO (connection-only)
- Irrelevant when: RDMAExtensions=No
- TargetDataSegmentLength=<numerical-value-512-to-(2**24-1)>
- Default is 8192 bytes
- Result function is Min
- This key is relevant only for the iSCSI connection of an iSCSI session if RDMAExtensions=Yes was negotiated in the leading connection of the session. It is used by the initiator and the target to negotiate the size of the data segments in SCSI Data-in PDUs for non-Final iSCSI PDUs to be sent by the target. The target MUST send all such non-last iSCSI PDUs with a data segment of exactly InitiatorRecvDataSegmentLength size whenever the PDUs constitute a data sequence whose size is larger than InitiatorRecvDataSegmentLength.

Slide 1

Changes to MaxRecvDataSegmentLength Key

- The following will be added to the key:
 - In the full feature phase for the iSCSI connection of an iSCSI session if RDMAExtensions=Yes was negotiated in the leading connection of the session, the following applies. Firstly, the key is irrelevant for SCSI Command PDUs, SCSI Data-out PDUs, and SCSI Data-in PDUs. Where MaxRecvDataSegmentLength is used as applicable to an initiator in [iSCSI] for the SCSI Command PDU and the SCSI Data-out PDU, TargetRecvDataSegmentLength MUST be used instead. Where MaxRecvDataSegmentLength is used as applicable to a target for the SCSI Data-in PDU, InitiatorRecvDataSegmentLength MUST be used instead. Secondly, MaxRecvDataSegmentLength need not be declared in the login phase. Instead in the full feature phase, the value of the initiator MaxRecvDataSegmentLength is set to InitiatorRecvDataSegmentLength in both the initiator and the target, and the value of the target MaxRecvDataSegmentLength is set to TargetRecvDataSegmentLength in both the initiator and the target.

Slide 1

RSTG-mtg-021216-ue.doc

Co-Chair selection

Pat - chaired 10Base and IEEE for 3 year. Lots of IETF experience. Major challenge make IETF feel iSER is a small change and not a new protocol.

Bill Edwards - no chair experience. Has experience chairing for non-profit organization. Working on iSCSI 1.0 for 2 years @HP. This is the first committee experience outside of HP.

VOTE:

Called by Uri

Adaptec	Pat
Agilent	Pat
Broadcom:	Pat
EMC	Pat
HP	Pat
IBM	Pat
Intel	Pat
Network Appliance	Pat

Unanimous vote.

HP motions that the iSER Header and Message formats be as defined in Option D on slides 17 through 21 of this slide deck (iSER-header-v06.ppt)

IBM seconds

Vote against - none

Abstain - none

Motion passes

Option D - iSER Header Format

1										2										3																																	
0	1	2	3	4	5	6	7	8	9	0	1	2	3	4	5	6	7	8	9	0	1	2	3	4	5	6	7	8	9	0																							
Opcode		rsvd								W	R	Credit	Credit Parm (Granted Credit / Retained Credit)																																								
										S	S	Op																																									
										V	V																																										
Write Stag or N/A																																																					
Read Stag or N/A																																																					

•Opcode values:

•0000b = iSCSI-PDU

•0001b = iSER-NOP


•0010b = Hello

•0011b = HelloReply

•Credit Op and Credit Parm Fields already voted as part of iSER-floating-credit-v05.ppt


Slide 1

Option D – Opcode=0000b (iSCSI-PDU)

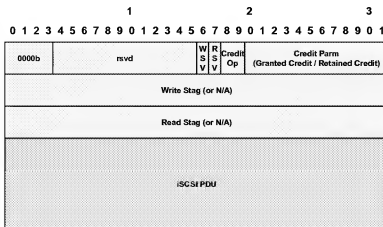

Slide 1

Option D – Opcode=0001b (iSER-NOP)



If no iSER message traffic is already available for sending a Grant-Credit or Retain-Credit operation, then an iSER-NOP Message is sent with the Credit-Op and Credit-Parm fields set accordingly.

Slide 1

Option D – Opcode=0010b (Hello)

1										2										3														
0	1	2	3	4	5	6	7	8	9	0	1	2	3	4	5	6	7	8	9	0	1	2	3	4	5	6	7	8	9	0				
0010b										rsvd										0	0	Credit Op (Granted Credit / Retained Credit)												
Max-Version					Min-Version					rsvd					Initiator-IRD																			
rsvd																																		

Slide 1

Option D – Opcode=0011b (HelloReply)

1										2										3											
0	1	2	3	4	5	6	7	8	9	0	1	2	3	4	5	6	7	8	9	0	1	2	3	4	5	6	7	8	9	0	1
0011b										rsvd										0	0	Credit Op (Granted Credit / Retained Credit)									
Max-Version					Active-Version					rsvd					Target-ORD																
rsvd																															

Slide 1

RSTG-mtg-030106-bill.doc

HP motions: Verbs should support a shared RQ (described as P-RQ in the preceding slides) across multiple QPs.

IBM seconds

Vote against - none

Abstain - none

Absent - NetApp
Motion passes

RSTG-mtg-030115.doc

HP moves to overturn the motion voted on 11/06/02 in which "HP moves that we accept the iSER-floating credit-v0.5.ppt as the flow control mechanism for iSER". HP makes this motion with the intent that the new proposal will take into account John Carrier's suggestion to add a new DI interface to let iSCSI know of the low water mark.

IBM seconds

Adaptec	Y
Agilent	Y
Broadcom:	Y
EMC	Y
HP	Y
IBM	Y
Intel	Y
Network Appliance	Abstain

Motion passes unanimously

HP moves to adopt option 4 in the iSER_flow_control_discussion_v0.22.ppt slide deck to "Completely drop the iSER Send Message Flow Control".

IBM seconds

Vote Against - NetApp
Abstain - Adaptec, EMC

Motion passes 5-1

RSTG-mtg-030122.doc

Broadcom moves that Verbs is required to support a low Watermark in the SRQ and the RI /RNIC is required to quantify the number of available WQEs on the SRQ, compare it to the low Watermark and generate an unaffiliated asynchronous event when SRQ occupancy drops below the Watermark.

EMC seconds

Vote against - none
Abstain - none
Motion passes

RSTG-mtg-030127-ue.doc

IBM motions that

A. Storage group guides the verbs writers to not add any text for setting the RQ depth when the QP is associated with a SRQ.

B. There will be a “Soft LIMIT” (smaller or equal to the SRQ depth) per QP to set a cap on the number of outstanding incomplete messages received per QP.

C. When the “Soft LIMIT” is reached the ULP is notified by an affiliated asynchronous event (one shot) and the QP continues normal receive operation.

Broadcom seconds
Vote against - Intel
Abstain - Adaptec, NetApp
Absent - EMC
Motion **passes**

IBM motions that we overturn the vote taken on December-16-2002 in which “HP motions that the iSER header and message format be as defined in option D on slide 17 through 21 of this slide deck (iSER-header-v0.6.ppt)”

Broadcom seconds

Adaptec	Yes
Agilent	Yes
Broadcom:	Yes
EMC	Absent
HP	Yes
IBM	Yes
Intel	Yes
Network Appliance	Yes


Motion **passes**

RSTG-mtg-030129-tc.doc


IBM motions that the iser header format be defined in option g

Intel seconds
Vote against - None
Abstain - None
Motion **passes**

Option G – Opcode=0000b (iSCSI-PDU)

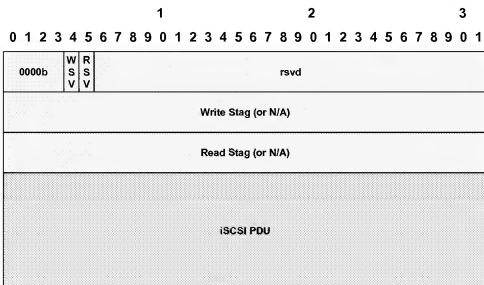

Option G – Opcode=0010b (HelloReply)

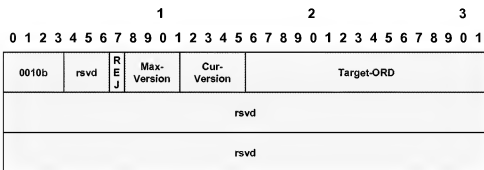

- REJ – Reject connection, if set to '1'

HP motions that the semantics of the new iSER header be the following. When the target determines its supported version is out bounds with respect to max version and min version specified in the hello message it **MUST** set the reject bit in the hello reply to one to indicate a failed hello exchange, and set the cur_version field to the lowest version it can support. The target must always set the max version field to the highest version the target can support. The Target **MUST** then follow up this

reponse by gracefully closing the TCP connection. The initiator iSER layer must not send any iSCSI full feature PDU's (either control or data types) until the hello reply message is received with a reject bit set to zero.

IBM seconds
Vote against - None
Abstain - None
Motion passes

RSTG-mtg-030203-Bill.doc

IBM motions to reopen a discussion on piggybacked status a.k.a. Status Phase collapse issue.

EMC seconds

Adaptec	Y
Agilent	Abstain
Broadcom:	Abstain
EMC	Y
HP	Abstain
IBM	Y
Intel	Abstain
Network Appliance	Absent

Motion passes

IBM Motions to overturn the previous status phase collapse vote to be replaced with: the iSCSI layer can use status phase collapse and if done the iSER layer must support it, by sending the data with an RDMA write followed by a Send of a zero length Data segment in a DATA IN PDU with S-bit Set.

None seconds
Motion rejected

RSTG-mtg-030210-hemal.doc

HP motions that the initiator and target STag invalidation semantics and the new DI primitive semantics proposed in this slide deck be accepted.

IBM seconds
Objections - None
Abstentions - NetApp
Motion passes

Normal task completion


- It is desirable to require the initiator implementations to cross-check the STag invalidation performed via the SendInvSE Message.
 - It does not place any new additional Verbs requirements – Verbs 0.87 (Poll CQ) text already specifies the “STag which was Invalidated” to be part of Work Completion.
 - It addresses the security concerns that are likely to be brought up on an STag invalidation requirement, where the STag value is specified by the remote node.
 - There is also the risk that the buffer pointed to by the STag is already used by iSCSI and SCSI layers (or the buffer could be in use by the ULPs).
- The proposed semantics are:
 - “When a unidirectional command completes on receiving a SCSI Response PDU on the initiator, the valid STag for the command, if any, is automatically invalidated. iSER layer on the initiator in such a case **MUST**, via RI-defined means, ensure that the correct STag is invalidated by the SendInvSE Message. If the iSER layer on the initiator deems that a wrong STag was invalidated by the SendInvSE Message, it **MUST** invalidate the correct STag and terminate the iSCSI connection.”
 - “When a bidirectional command completes on receiving a SCSI Response PDU on the initiator, the valid Read STag is automatically invalidated. iSER layer on the initiator **MUST** manually invalidate the Write STag for the command, if any. In addition, iSER layer on the initiator **MUST**, via RI-defined means, ensure that the correct Read STag is invalidated by the SendInvSE Message. If the iSER layer on the initiator deems that a wrong STag was invalidated by the SendInvSE Message, it **MUST** invalidate the correct STag and terminate the iSCSI connection.”

Abnormal termination

- The following cases could lead to SCSI and iSCSI layers concluding that a task terminated abnormally.
 - Completion of one of the task management functions (TMF) affecting the task in question –
 - ABORT TASK, ABORT TASK SET, CLEAR TASK SET, LU RESET, TARGET WARM RESET, TARGET COLD RESET
 - Any other iSCSI/SCSI-discernible condition (such as POWER ON RESET sense data)
- Two options to specify STag invalidation requirements are –
 - a) Expect the iSER layer to detect and invalidate the STag(s) for a terminated task when appropriate.
 - Requires the iSER layer to be cognizant of the iSCSI session affiliation, and requires a lot more iSCSI/SCSI knowledge on the part of the iSER layer.
 - b) Define a new DI Operational Primitive from the iSCSI layer to the iSER layer that is invoked when the task resources are to be deallocated.
 - Requires a new DI Primitive to be added, but is architecturally clean.

Proposal is to adopt Option (b).

Deallocate_Task_Resources

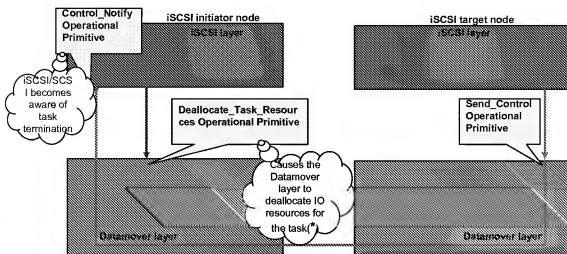

(*) In the case of iSER, the iSER layer invalidates the STag(s) associated with the task.

Input qualifiers to the Deallocate_Task_Resources: Connection_Handle, ITT

Return Results: Not specified

If we adopt this, it would be desirable to rename the existing Deallocate_Task_Resources Primitive to Deallocate_Connection_Resources and Allocate_Task_Resources to Allocate_Connection_Resources, to avoid confusion.

Abnormal termination semantics for iSER

- If we agree to define the new DI Primitive Deallocate_Task_Resources, the iSER semantics should be –

"When a unidirectional or bidirectional command terminates from the iSCSI perspective without an associated SCSI Response PDU received at the initiator, as indicated through the Deallocate_Task_Resources Primitive invocation, initiator iSER layer **MUST** manually invalidate the STag(s) currently associated with the task identified in the Deallocate_Task_Resources Primitive invocation from the iSCSI layer."

Target STag invalidation semantics (Sink)

- A target iSER layer implicitly Advertises its Data Sink STag when it does an RDMA Read to fetch the SCSI Write data. iSER spec rev0.75 does not define the invalidation requirements on the target after the RDMA Read Response is received (i.e. when Data_Completion_Notify is notified to the iSCSI layer).
- There are at least two options to address this.
 - a) Require that the iSER layer MUST invalidate the Data Sink STag(s) at the conclusion of the I/O.
 - If an implementation strictly does this, this exposes the STag longer than it is meant for. There is also the risk that the buffer pointed to by STag is already used by iSCSI and SCSI layers (or the buffer could be in use by the ULPs).
 - b) Require that the iSER layer MUST invalidate each Data Sink STag at the conclusion of the RDMA Read Operation referencing the Data Sink STag.

Proposal is to adopt (b).

Note: The existing "RDMA Read with Invalidate Local STag" Operation type in the PostSQ WR of RDMAC Verbs 0.87 does (b), so it does not add any additional complexity to the iSER layer to invalidate the Sink STag.

Target STag invalidation semantics (remote)

- The remote STag invalidation semantics in the normal completion are proposed to be (I think we all agree to this)
- "The remote STag (i.e. initiator STag/STags to ITT) mapping MUST be maintained through the duration of the task by the target iSER layer, and the mapping MUST be invalidated by the target iSER layer upon sending the associated SCSI Response PDU for the task."
- It turns out that the Deallocate_Task_Resources Primitive proposal is also useful for a target. If we adopt the Deallocate_Task_Resources Primitive proposal, the abnormal termination semantics can be summarized thus -
- "When a unidirectional or bidirectional command terminates from the iSCSI perspective without an associated SCSI Response PDU sent from the target, as indicated through the Deallocate_Task_Resources Primitive invocation, target iSER layer MUST invalidate the remote STag(s) currently associated with the task identified in Deallocate_Task_Resources Primitive invocation from the iSCSI layer."

RSTG-mtg-030212jc.doc

**IBM motions that we adopt the schedule as shown in this doc
(stg_doc_schedule_v03.ppt)**

HP seconds

Objections - None

Abstentions - None

Motion passes

iSER/DI Specification Schedule

	Schedule worked out at 9/4 F2F	Revised schedule for iSER on 2/11/03	Revised schedule for DI on 2/11/03
.1 Annotated Outline	9/12/02	9/12/02	9/12/02
.5 Initial Full Draft	10/22	10/22	10/22
.7 1 st F2F input inc. Format Complete	12/13	12/13	12/13
.8 Functionally Done Few open Issues	1/17/03	2/12/03	2/19/03
.85 Feedback Included Consistency Checks	-	-	-
.9 Essentially Complete Ready for Internal Reviews	2/14	3/7	3/7
.95 30 day Copyright Review	3/7	4/11	4/11
1.0 Release to Web/ETF	4/14	5/16	5/16

RSTG-mtg-030317-pat.doc

HP moves that –

-
- A. The Send_Control invocation for sending a SCSI command includes the additional qualifier "UnsolicitedDataSize", that indicates the size of immediate and non-immediate unsolicited data for the command.**
- B. iSER spec should require an initiator to allocate an STag for a write I/O buffer (in SCSI Writes or bidirectional commands) and Advertise it to the target only if the Expected Data Transfer Length of the SCSI command > UnsolicitedDataSize.**
- C. iSCSI layer on the target MUST NOT issue recovery R2Ts on an iSCSI/iSER connection for a task whose connection allegiance was never reassigned (the only plausible reason being a sequence reception timeout in such a case). The target iSER layer may reject such a recovery R2T received via the Get_Data primitive, from the target iSCSI layer, with an appropriate error code. iSCSI layer on the target MAY however issue recovery R2Ts on an iSCSI/iSER connection, if the related task was earlier reassigned ([iSCSI]) to that connection.**

Intel seconds

Adaptec	Abs
Agilent	N
Broadcom:	Y
EMC	Y
HP	Y
IBM	Y
Intel	Y
Network Appliance	--

Motion passes.

RSTG-mtg-030331.doc

IBM moves that we add a qualifier on the Put_Data and Get_Data operational primitives which, if set, signifies that the Data_Completion_Notify operational primitive MUST be driven upon completion. If not set, signifies that the Data_Completion_Notify operational primitive MUST NOT be driven upon completion.

Intel seconds.

Adaptec	Y
Agilent	Y
Broadcom:	Abstain
EMC	
HP	N
IBM	Y
Intel	Y
Network Appliance	

Motion passes.

IBM moves that we change the schedule of version 0.9 of iSER and DI specs to 4/4/2003 and change the 0.95 version to 5/16/2003 and the version 1.0 to 6/16/2003

HP seconds

Objections - None

Abstentions - None

Motion passes

RSTG-mtg-030402.doc

IBM motions "The feature set for the iSER/DI spec is frozen as of 4/2/03.

Any new feature additions will require a two thirds majority vote to be adopted."

Broadcom Seconds

Adaptec	Y
Agilent	Y
Broadcom:	Y
EMC	Y
HP	Y
IBM	Y
Intel	Y
Network Appliance	absent

Motion passed.

RSTG-mtg-030424-mk.doc

HP motions that the DI 0.9 document be enhanced to be an architecture document and be called Datamover Architecture document (DA). iSER will be an instantiation of this architecture.

Adaptec seconds

Objections - None

Abstentions - None

Motion passes

RSTG-mtg-030429-tt.doc

IBM moves that we add the change to require that the target's iSER-ORD be reduced to be less than or equal to the initiator's iSER-IRD as declared in the iSER Hello message, and alter the appropriate text to use iSER-ORD instead of minimum of IRD and ORD. Include informational text on how to derive iSER-IRD and iSER-ORD from the RI.

EMC seconds

Objections - None

Abstentions - None

Motion passes

RSTG-mtg-030514.doc

IBM moves to forward the DA 0.95 and iSER 0.95 specifications to the Contributors's working group.

HP Seconds

Adaptec	Y
Agilent	Y
Broadcom:	Absent
EMC	Y
HP	Y
IBM	Y
Intel	Y
Network Appliance	Y

Motion passed.

RSTG-mtg-030616.doc

IBM moves that we approve the changes made to address the errata for iSER/DA version 0.95 release.

HP seconds

Adaptec	Y
Agilent	Y
Broadcom:	Y
EMC	Y
HP	Y
IBM	Y
Intel	Y
Network Appliance	Y

Motion passed unanimously.

IBM moves that we remove the change bar from DA version 0.95 and iSER version 0.97 and create version 0.98 to be forwarded to the Contributor's working group as a candidate for version 1.0 of DA and iSER specifications.

HP seconds

Adaptec	Y
Agilent	Y
Broadcom:	Y
EMC	Y
HP	Y
IBM	Y
Intel	Y
Network Appliance	Y

Motion passed unanimously.